


Typicals values

Nessol 40

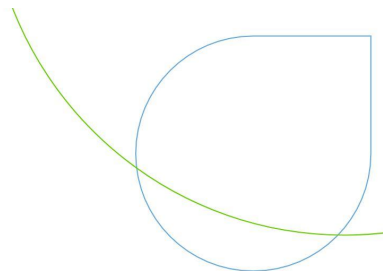

15/10/2019

Important info :

This sheet does not provide the specifications but only informed about the typical values reached by our product, for more info contact your specialty product team: specialty.products@neste.com

Properties	Unit	Typicals	Test Method
Appearance	-	C&B	ASTM D4176
Colour, Saybolt	-	> 30	ASTM D6045
Density at 15°C	kg/m ³	~ 783	EN ISO 12185
Flash point	°C	~ 44	DIN 51755
Distillation			
IBP	°C	~ 160	EN ISO 3405
50%	°C	~ 168	
Dry point	°C	~ 194	
Viscosity			
at 20°C	mm ² /s	~ 1.2	EN ISO 3104
at 40°C	mm ² /s	~ 1.0	
Aromatics	% m/m	~ 13.5	EN 12916
Benzene	mg/l	< 1	NM 111 (GC-MS)
Aniline point	°C	~ 57	ISO 2977
Sulfur content	mg/kg	< 1	EN ISO 20846
Doctor test	-	Negative	ASTM D4952
Copper Corrosion	-	1a	EN ISO 2160
Bromine index	mg Br/100g	100 - 140	ASTM D2710
Kauributanol value	-	~ 36	ASTM D1133
Refractive Index	-	~ 1.436	ASTM D1218