


Typicals values

Nessol 60

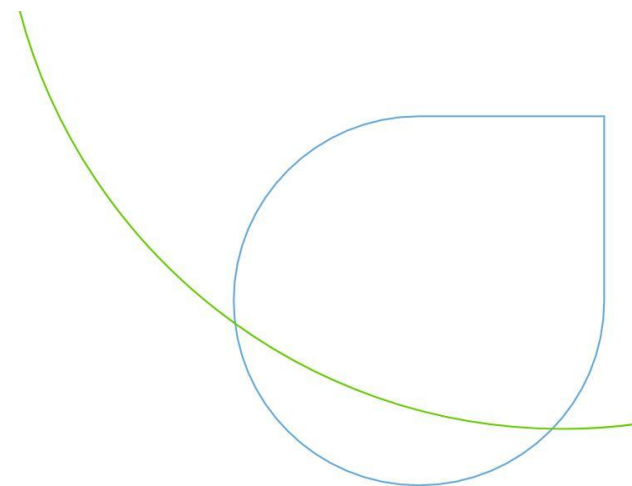

1/12/2019

Important info :

This sheet does not provide the specifications but only informed about the typical values reached by our product, for more info contact your specialty product team: specialty.products@neste.com

Properties	Unit	Typicals	Test Method
Density at 15°C	kg/m ³	~ 798	EN ISO 12185
Colour, Saybolt	-	> 30	ASTMD 6045
Viscosity	at 20°C	mm ² /s	EN ISO 3104
	at 40°C	mm ² /s	
Sulfur content	mg/kg	< 1	EN ISO 20846
Flash point	°C	~ 62	EN ISO 2719
Copper Corrosion	-	1a	EN ISO 2160
Doctor test	-	Negative	ASTM D4952
Aniline point	°C	~ 59	ISO 2977
Kauributanol value	-	~ 35	ASTM D1133
Aromatics	% m/m	~ 16	EN 12916
Refractive Index	-	1.4428	ASTM D1218
Benzene	mg/l	<1	NM 111
Distillation	IBP	°C	EN ISO 3405
	90%	°C	
	FBP	°C	